


# Medium Dome Camera



## Features

- Sony Super HAD CCD sensor
- Built-in Vari-Focal Lens / Board Lens
- DC voltage

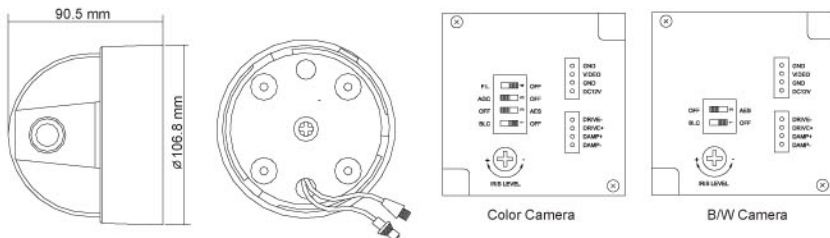

Model No.	RYK-2449VF3(VF9)	RYK-2485VF3(VF9)	RYK-3441VF4(VF9)	RYK-3443VF4(VF9)
	RYK-2411	RYK-2485	RYK-3441	RYK-3443
Image Device	1/3" Color Sony Super HAD	1/3" Color Sony Super HAD (Hi-Res.)	1/3" B/W Sony Super HAD	1/3" B/W Sony Super HAD (Hi-Res.)
Picture Elements	NTSC:510x492, PAL:500x582	NTSC:768x494, PAL:752x582	EIA:510x492, CCIR:500x582	EIA:768x494, CCIR:752x582
Resolution	380 TVL	470 TVL	420 TVL	600 TVL
Min. Illumination	0.2 Lux / F2.0	0.3 Lux / F2.0	0.1 Lux / F2.0	0.2 Lux / F2.0
S/N Ratio	More than 48dB			
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000		EIA:1/60~1/100,000, CCIR:1/50~1/110,000	
Flickerless Mode	On / Off (for VF3, VF4, VF9 model)		-	
Gamma	0.45			
Iris Control	DC Drive (for VF3, VF4, VF9 model)			
Lens Furnished	VF3 model : Vari-Focal 3.7~12mm / F1.6~3.0, Wide:71.6°x55.8°, Tele:23.8°x17.9°(HxV) VF4 model : Vari-Focal 4.0~9mm / F1.5~360, 87.0°~42.0° VF9 model : Vari-Focal 9.0~22mm / F2.0~360, Wide:29.2°x21.7°, Tele: 13.0°x9.7° (HxV) Other model : Board Lens 3.6mm / F2.0 (option:2.5/4.3/6/8/12/16mm)			
White Balance	Auto		-	
Gain Control	High / Low (for VF3, VF4, VF9 model) Auto (for other model)		Auto	
Back Light Comp.	On / Off			
Video Output	1 Vp-p / 75 Ohms			
Audio Output	2 Vp-p / 50 Ohms (option)			
Power Supply	DC12V ± 10%			
Power Consumption	142mA max.	110mA max.	133mA max.	142mA max.
Operating Temp.	-10°C ~ 50°C			